

PRODUCT: SS-0809-01 SMALL GABLE

SIZE: 8' x 9' x 8' ENTRY

TYPE: STEEL SHADE SERIES

ROOF: STEEL ROOF PANEL



STRUCTURAL STEEL

1. HOLLOW STRUCTURAL SECTIONS: TO ASTM A500, GRADE C.
2. STRUCTURAL PIPE: TO ASTM A53, GRADE B.
3. PLATES: TO ASTM A572, GRADE 50.
4. STRUCTURAL STEEL DESIGN: TO CSA S16.1.
5. STRUCTURAL STEEL SHALL BE DETAILED, FABRICATED AND ERECTED IN ACCORDANCE WITH CISC SPECIFICATIONS.

FABRIC SPECIFICATION

PERFORMANCE

- ASTM D5034
 TENSILE STRENGTH AND ELONGATION
 MAXIMUM FORCE – WARP (MEAN) 158.6 LBF
 ELONGATION AT MAXIMUM FORCE (MEAN) 89%
 MAXIMUM FORCE – WEFT (MEAN) 412.3 LBF
 ELONGATION AT MAXIMUM FORCE – WARP (MEAN) 49%

ASTM D2261

- TEARING STRENGTH – TONGUE (SINGLE RIP)
 MEAN FORCE – WARP 39.6 LBF
 MEAN FORCE – WEFT 43.0 LBF

ASTM D6797

- BURSTING STRENGTH – BALL BURST (CONSTANT RATE OF EXTENSION)
 MEAN FORCE 408 LBF

LEAD AND PHTHALATE FREE

AIRCRAFT CABLE

- 1.- WIRE ROPE CABLE SHALL BE 7x19 STRAND CORE GALVANIZED WIRE ROPE WITH A BREAKING STRENGTH VALUE OF 64,054N [14,400 LBS] (6.35MM [1/4"] DIAMETER).
- 2.- CABLES SHALL BE FED THROUGH THE FABRIC SLEEVES AROUND THE PERIMETER OF THE CANOPY AND TENSIONED UNTIL THE FABRIC PANELS (DESIGNED PURPOSELY UNDERSIZED) REACH A TAUNT APPEARANCE. ANY LONG TERM CABLE SAG SHALL BE MINIMIZED DURING THE MAINTENANCE RE-TIGHTING VISITS AS REQUIRED.



NOTICE




FABRIC TOP NEEDS TO BE REMOVED IF SNOW IS ANTICIPATED

FABRIC TOP NEEDS TO BE REMOVED IF WINDS EXCEEDING 100 KM/H [60 MPH] ARE ANTICIPATED

FEATURES:

- OPTIONAL BENCH OR KIOSK BOARD
- NO NESTING LEDGES
- FACTORY POWDER COATED FRAME
- 26GA STEEL PANEL ROOF IN 10 COLOURS
- 4/12 ROOF PITCH
- LOW MAINTENANCE

 SUN SHADE CO.		
502 HARVARD DR. BELLE RIVER, ON N8L 0B2	DRWN BY: XXXX CHECKED BY: XXXX	GENERAL NOTES
WWW.SUNSHADECO.COM		SHEET 1 OF 2

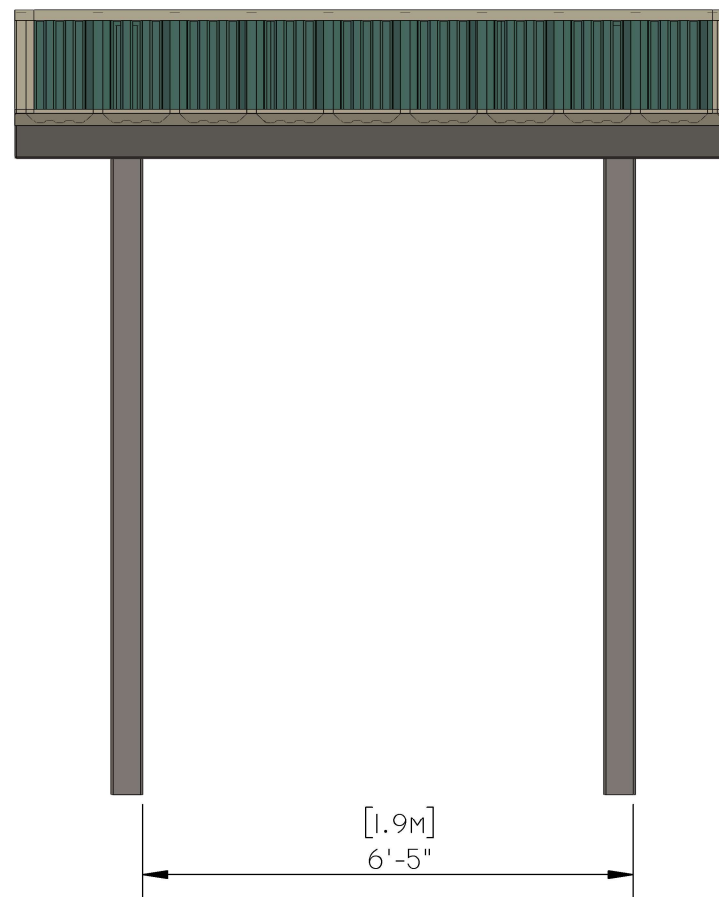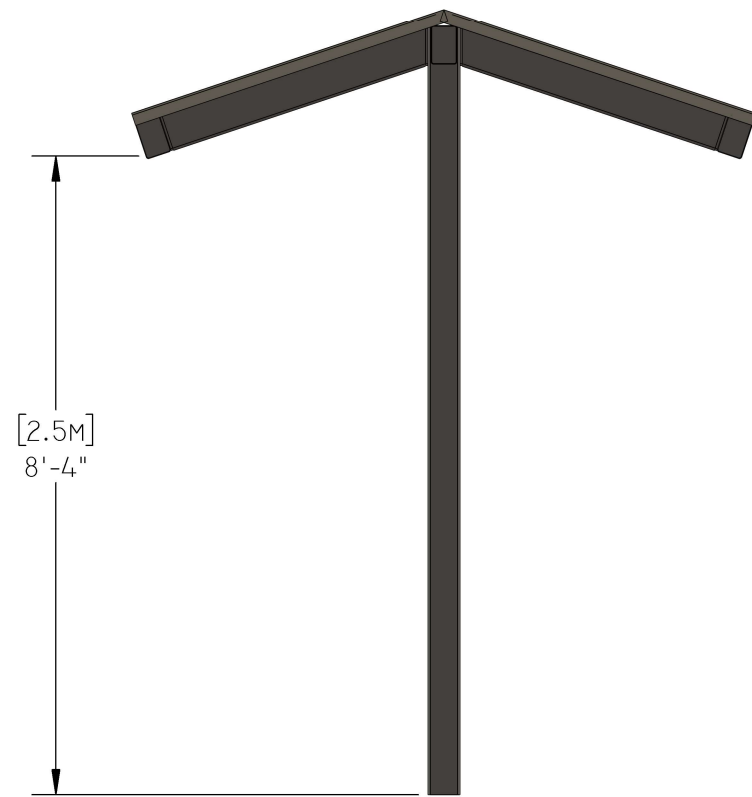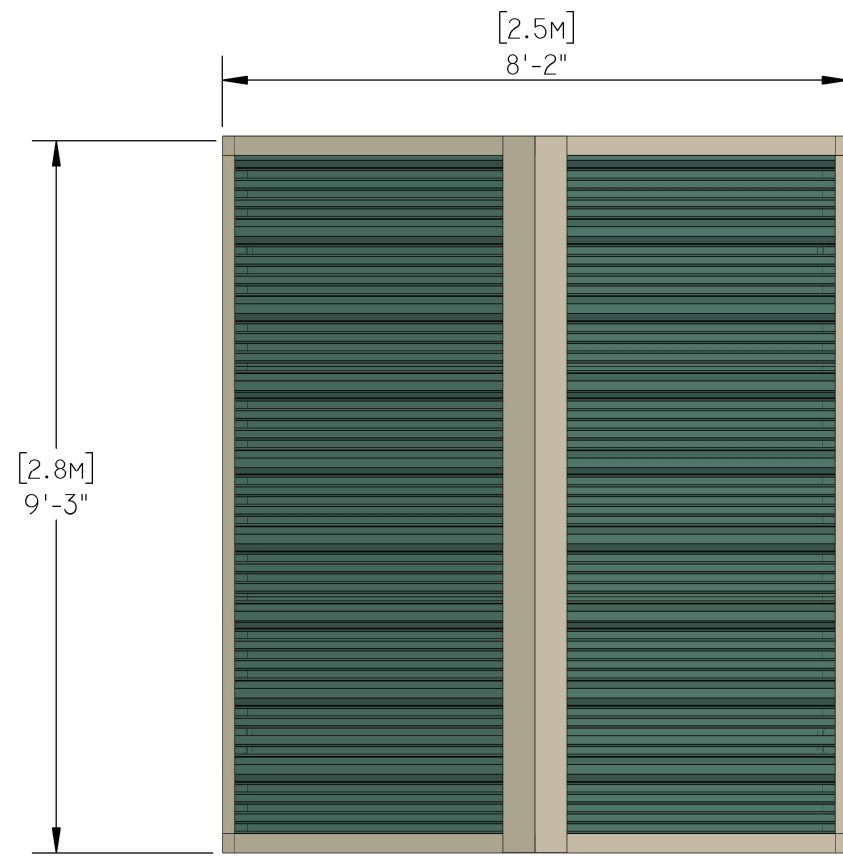

502 HARVARD DR. BELLE RIVER, ON N8L 0B2	DRWN BY: XXXX CHECKED BY: XXXX	ELEVATIONS
WWW.SUNSHADECO.COM		SHEET 2 OF 2